Total No. of Questions: 6

http://www.onlinebu.com

YA17-185

Total No. of Printed Pages: 4

EKS-313

B.E. I Semester (CGPA) Civil Engg. **Examination 2017**

BASIC MECHANICAL ENGINEERING

Paper: CE-104

Time Allowed: Three Hours

Maximum Marks: 60

Note: Attempt all questions. Use of steam table is permitted. Use neat and clean diagram wherever required.

Q.1.	An	swer in one word - 2 each
	a)	A Cochran boiler is a, fire tube boiler.
	b)	A flame is one in which supply of oxygen is more than to acetylene.
	c)	The latent heat of vaporization is at the critical point.
	d)	The four stroke cycle is complete inrevolutions of crankshaft.
	e)	During throttling process remain unchanged.
Q.2.	a)	Describe the process of formation of steam and give its graphical representation also.

EKS-313 http://www.onlinebu.com

with the well labelled diagram.

Explain the construction and working of locomotive boiler

http://www.onlinebu.com

http://www.onlinebu.com

http://www.onlinebu.com

OR

- Find the internal energy of 1kg of superheated steam at a pressure of 10 bar and 280°C. It this steam be expanded to a pressure of 1.6 bar and 0.8 dry. Determine the change in internal energy. Assume specific heat of super heated steam as 2.1 kJ/kgk.
- How are boiler classification? State which types of boiler is used for power generation and why?
- Distinguish between petrol engine and diesel engine. 4 Q.3. a)
 - A petrol engine has a cylinder diameter of 60mm and stroke 100mm. If the mass of the charge admitted per cycle is 0.0002 kg, find the volumetric efficiency of the engine. Assume characteristics constant for the charge as 287 J/kg k.

OR

- Explain the following terms:
 - Indicated power
 - Overall efficiency
 - Brake power

BOTOWINESA.

- iv) Compression ratio
- Explain merits and demerits of 2-stroke engine over 4-stroke engine.
- Differentiate between summer and winter air conditioning. Q.4. a) area to not management from
 - Derive an expression for the quantity of heat flow through a composite slab

http://www.onlinebu.com

http://www.onlinebu.com (3)

OR

- A metal pipe having an external diameter of 150mm carries steam at 200°C. The pipe is covered by a layer of 25mm thick of an insulating material whose conductivity is 0.21 w/mk. If the outer surface is at 100°C, find the amount of heat lost per meter length per minute.
- Define the following:

- Specific humidity
- Dew point
- Dry bulb temperature
- Relative humidity
- Compare between cast Iron and steel on compositions, Q.5. a) properties types and applications.
 - Distinguish between primary, secondary and tertiary measurement.

OR

- Draw labelled diagram of sine-bar and explain construction and working.
- Define following:

http://www.onlinebu.com

- Brittleness
- Ductility
- Fatigue

http://www.onlinebu.com

http://www.onlinebu.com


(4)

Differentiate between: Q.6.

- Arc welding and Gas welding
- Chills and chaplets
- iii) Moulding material and metallurgical generated defects.
- Explain the different types of moulding mixture with their compositions and applications.

OR

- Enumerate the different types of pattern with their uses.
- Explain the principle working and construction of MIG plant.

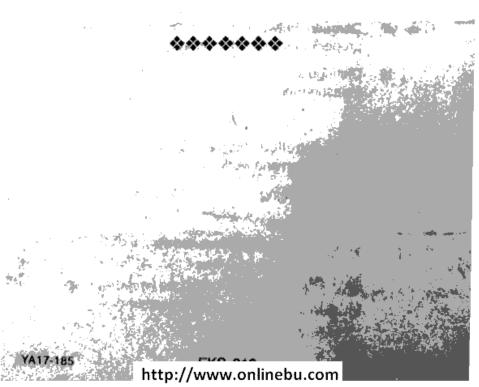

http://www.onlinebu.com